


PW4MC3...

Single point load cells




Special features

- For determining small masses
- Small size
- Accuracy class C3
- Off center load compensated
- Degree of protection IP65 according to IEC 529

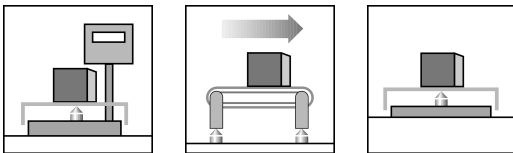

Dimensions (in mm; 1 mm= 0.03937 inches)

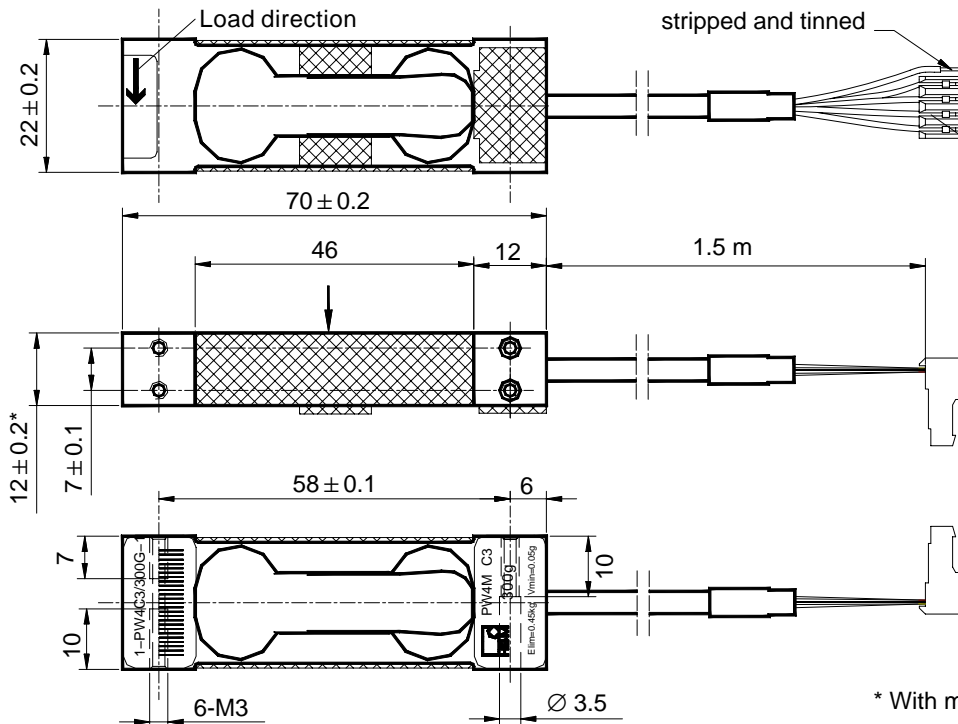

Plug: CE 100F26-4 (Pancon)
Wiring code (4-core)
 Pin1 Excitation (+) blue
 Pin2 Signal (+) white
 Pin3 Signal (-) red
 Pin4 Excitation (-) black
 Shield yellow
 (connected to load cell body)

Mounting:
 Socket head cap screws: M3 - 8.8
 Tightening torque: 1.3 N-m

* With max. capacities 2 kg and 5 kg: 15 ± 0.2

Specifications

Type	PW4MC3...				
Order-No.	1-PW4C3/300G-1	1-PW4C3/500G-1	1-PW4C3/2KG-1	1-PW4C3/3KG-1	
Accuracy class	C3*				
Maximum number of load cell intervals (n_{LC})	3000				
Maximum capacity (E_{max})	kg	0.3	0.5	2	3
Minimum LC verification interval (v_{min})	g	0.05	0.1	0.2	0.5
Temperature effect on zero balance (TK_0)	% of C_n / 10 K	0.0233	0.0280	0.0140	0.0233
Max. platform size	mm	200 x 200			
Sensitivity (C_n)		1.0 ± 0.1		2.0 ± 0.2	
Zero signal	mV/V	0 ± 0.1			
Temperat. effect on sensitivity (TK_C) ¹⁾ Temperature range: +20 ... +40 °C [68...104 °F] -10 ... +20 °C [14...68 °F]	% of C_n / 10 K	± 0.0175 ± 0.0117			
Hysteresis error (d_{hy}) ¹⁾	% of C_n	± 0.0150			
Non-linearity (d_{lin}) ¹⁾		± 0.0150			
Minimum dead load output return (DR)		± 0.0245			
Off center load error ²⁾		± 0.0233			
Input resistance (R_{LC})	Ω	380 ± 38			
Output resistance (R_0)		380 ± 38			
Reference excitation voltage (U_{ref})	V	5			
Nominal range of excitation voltage (B_U)		1 ... 12			
Insulation resistance (R_{is}) at 100 V _{DC}		GΩ	> 2		
Nominal temperature range (B_T)	°C [°F]	-10 ... +40 [+14...+104]			
Operating temperature range (B_{tu})		-10 ... +50 [+14...+122]			
Storage temperature range (B_{tl})		-25 ... +70 [-13...+158]			
Limit load (E_L) ^{*)}	% of E_{max}	150			
^{*)} at max. eccentricity	mm	100			
Lateral load limit (E_{lq}), static	%	200			
Breaking load (E_d)	of E_{max}	> 300			
Deflection at E_{max} (s_{nom}), approx.	mm	< 0.4			
Weight, without cable (G), approx.	kg	0.07			
Degree of protection according to IEC529		IP65			
Material: Measuring element Coating Cable sheath		Aluminum Silicone rubber PVC			

* Test certificate in preparation

1) The data for Non-linearity (d_{lin}), Hysteresis error (d_{hy}) and Temperature effect on sensitivity (TK_C) are typical values. The sum of these data meets the requirements according to OIML R60.

2) According to OIML R76

Modifications reserved.

All details describe our products in general form only. They are not to be understood as express warranty and do not constitute any liability whatsoever.

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45, D-64293 Darmstadt, Germany
Tel.: +49 6151 803-0 Fax: +49 6151 803 9100
Email: support@hbm.com Internet: www.hbm.com



measurement with confidence